

# LOW PROFILE SMT SOCKET(SOJ)



SOJ Series

## Material

Insulator : Glass Filled P.P.S.(UL94V-0)  
 Contact : Phosphor bronze  
 Contact Plated : Tin plated

## Specification

Current Rating: 1A  
 Insulation Resistance : 1000M $\Omega$  Min. at 500V DC  
 Dielectric Withstanding Voltage: AC 250V r.m.s.  
 Contact Resistance : 30m $\Omega$  Max.  
 Operating Temperature -50 $^{\circ}$ C ~ +105 $^{\circ}$ C

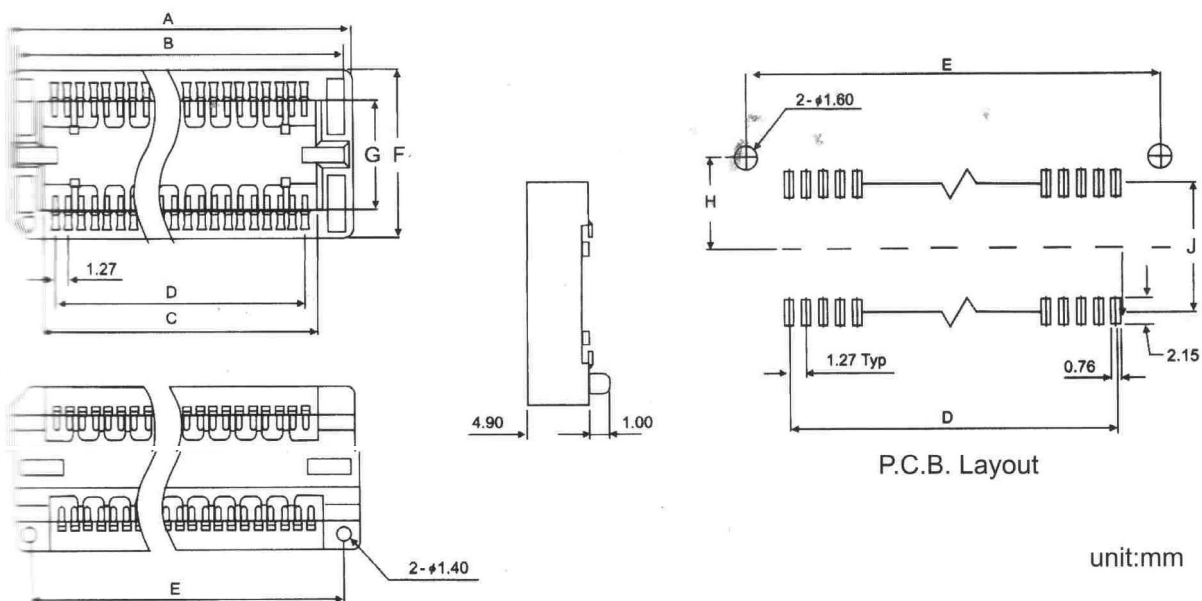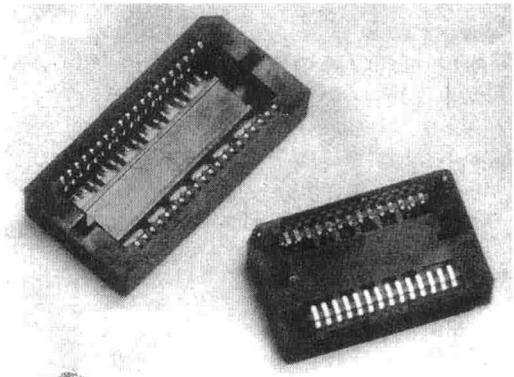

No.Of Contacts	Dimensions								
	A	B	C	D	E	F	G	H	J
24	23.20	21.10	16.70	13.97	21.59	13.6	8.4	5.56	7.05
26	24.46	22.26	17.98	15.24	22.86	13.6	8.4	5.56	7.05
28	25.82	23.62	19.26	16.51	24.13	13.6	8.4	5.56	7.05
28	25.74	23.62	19.26	16.51	24.13	16.4	10.8	6.83	9.60
32	28.26	26.16	21.80	19.05	26.67	13.6	8.4	5.56	7.05
40	33.38	31.26	26.26	24.13	31.75	16.4	10.8	6.83	9.60

## Order Information

Series No .	No .of Contacts	Contact Plating	Guiding Post	Insulator Body
SOJ	XXX	T	1	P

(S:7.65mm) (L:10.16mm)  
 24S 28S 28L 40L  
 26S 32S

T: Tin

1: Without Posts  
 2: With Posts

P: PPS  
 B: PBV