

0.100" (2.54 mm) Pitch Center Crimp Connector


CDHL Series

FEATURES:


- Insulator: P.B.T UL 94V-0
- Terminal: phosphor bronze
- Finish: Tinplated

SPECIFICATIONS


- Current rating: AC DC 3A
- Voltage rating: AC DC 250V
- Withstand Voltage: 1000V AC/min
- Insulation resistance: 1000mΩ min
- Temperature range: -25°C – 85°C
- Applicable wire: AWG#22 – #30

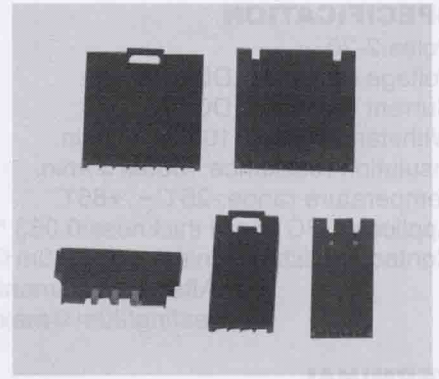

TERMINAL CDHL T

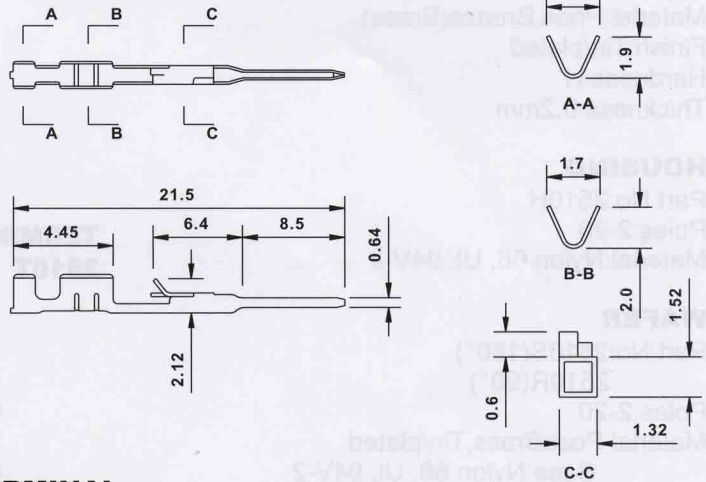

TERMINAL CDHL

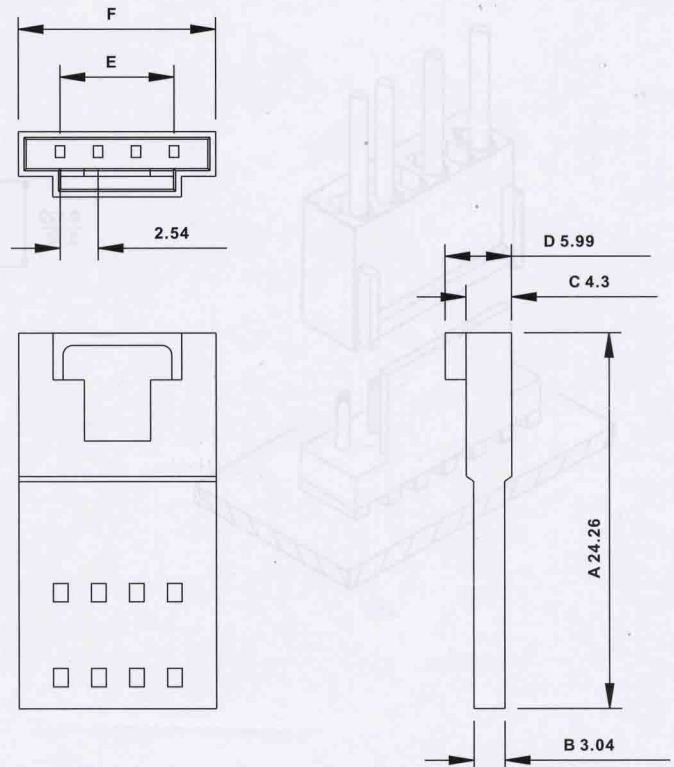

Circuits	Dim.E	Dim.F
2	2.54	7.12
3	5.08	9.66
4	7.62	12.20
5	10.16	14.74
6	12.70	17.28
7	15.24	19.82
8	17.78	22.36
9	20.32	24.90
10	22.86	27.44
11	25.40	29.98
12	27.94	32.52
13	30.48	35.06

Circuits	Dim.E	Dim.F
14	33.02	37.60
15	35.56	40.14
16	38.10	42.68
17	40.64	45.22
18	43.18	47.76
19	45.72	50.30
20	48.26	52.84
21	50.80	55.38
22	53.34	57.92
23	55.88	60.46
24	58.42	63.00
25	60.96	65.54