

SCSI II CENTRONIC PCB STRADDLED MOUNT

SCS Series

1. MATERIAL





INSULATOR: PBT +30% GF UL 94V-0
SHELL: ZINC ALLOY NICKEL PALTED:

2. CONTACT PLATING



S=GOLD FLASH ON CONTACT. TIN/LEAD 90 OR 80u"
ON TAIL, BOTH OVER NIKEL 30u"
C=15u GOLD(SELECTIVE)
D=30u GOLD(SELECTIVE)

3. ENVIRONMENTAL


OPERATING TEMPERATURE: -40 °C to +105°C

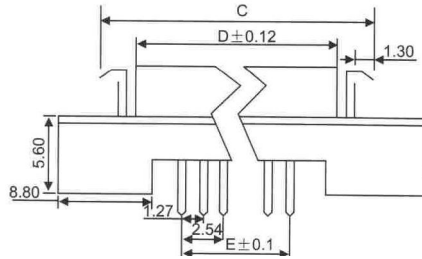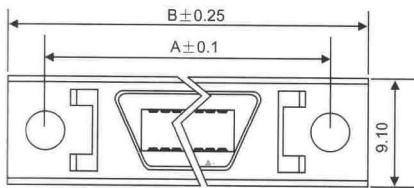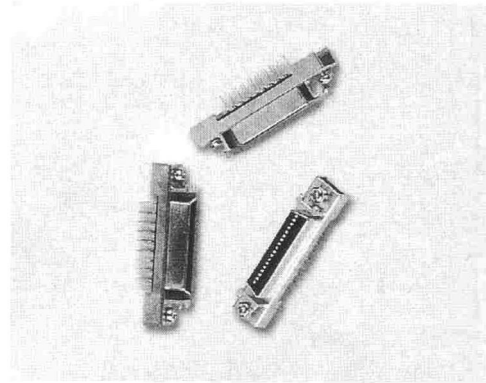

NO	A	B	C	D	E
1	23.65	29.8	19.85	12.57	7.62
2	27.46	33.6	23.46	16.38	11.43
3	31.27	37.4	27.27	20.19	15.24
4	37.62	43.4	33.62	26.54	21.59
5	46.61	62.6	42.61	35.43	30.48
6	57.94	64.0	53.94	46.86	41.91

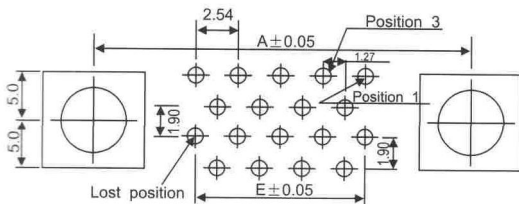


Recommended PCB Layout TOLERANCE ± 0.05
suitable contact 14, 26, 50

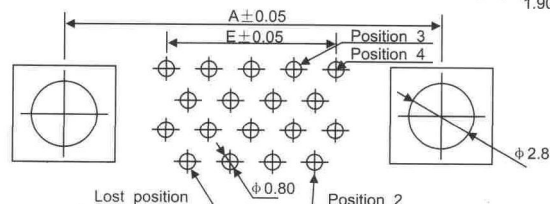

Recommended PCB Layout TOLERANCE ± 0.05
suitable contact 20, 36, 68

Order Information

Series No

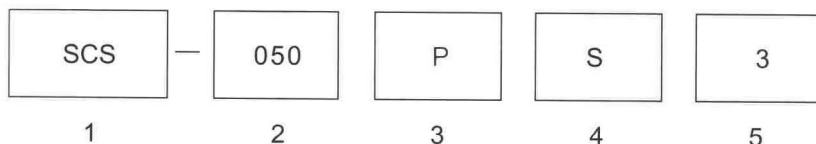

1. SERIES NO.

SCS

2. CONTACT NUMBER

014 020 026 036
040 050 060 068
080 100

3. CONTACT TYPE

P = MALE
S = FEMALE

4. CONTACT PLATING

S = SELECTIVE GLOD
G = GOLD FLASH
C = 15u " GOLD
D = 30u " GOLD

5. INSULATOR COLOR

3 = BLACK