


SCSI II, III, SERIES (Pitch:1.27mm)

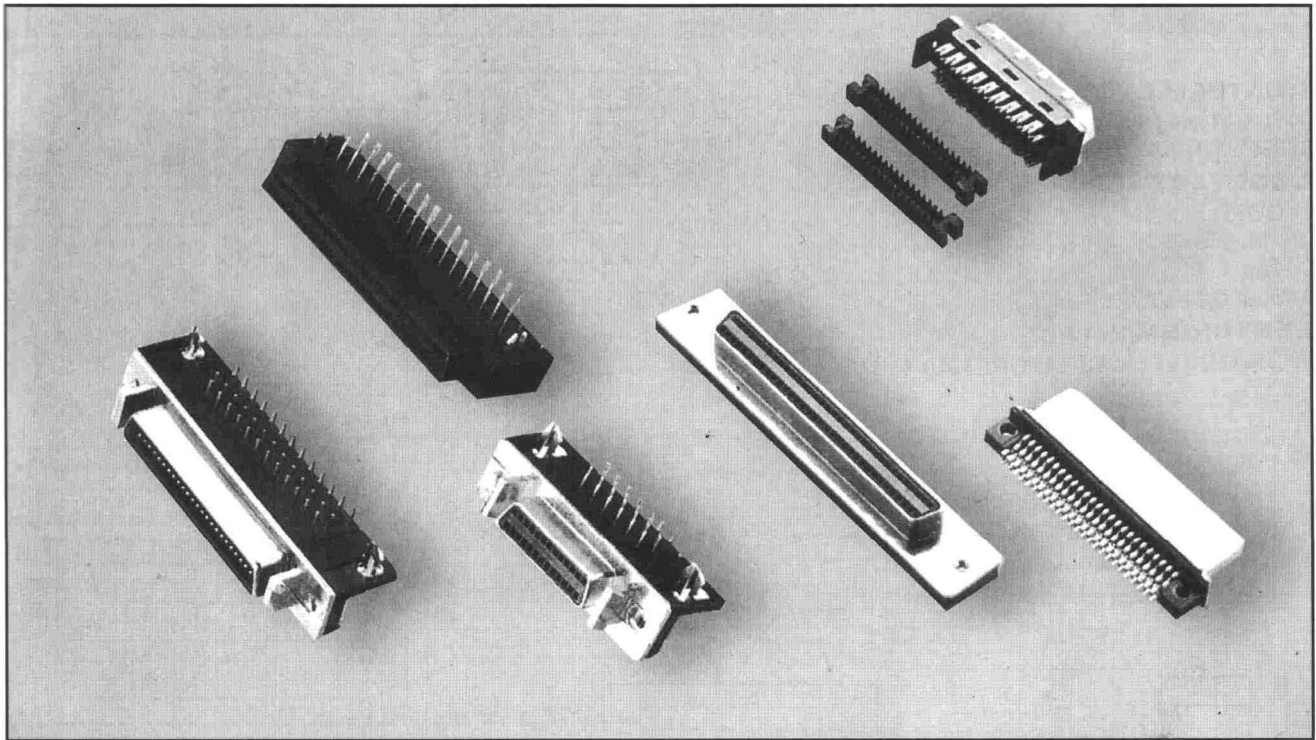

MATERIAL & FINISHES

- INSULATOR** — PBT GLASS FILLED
NY10N-6T (PIN HEADER, FFMAIF HEADER)
UL 94V-0
- CONTACT** — PHOSPHOR BRONZE OR BRASS
- SHELL** — ZINC ALLOY
- HOOD** — ZINC ALLOY OR P.V.C.
- PLATING** — CONTACT
1. GOLD FLASH
2. SELECTIVE GOLD OVER NICKEL PLATED (CONTACT AREA)
TIN/LEAD OVER NICKEL PLATED (TALL AREA)
— SHELL AND HOOD
NICKEL PLATED

ELECTRICAL CHARACTERISTICS

- CURRENT RATING** : 1A
- CONTACT RESISTANCE** : 15 m Ω max
- INSULATION RESISTANCE** : 500 M Ω Min AT 500V
- DIELECTRIC VOLTAGE** : AC 500V/Min
- OPERATING TEMPERATURE:** -55°C ~ +105°C