

Pin connectors 1.27mm

Single row/double row/triple row

Solder tail, right angle

Series: PEB

Ultraminiature PCB pin connectors, solder tail right angle

Technical Specs:


Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass CuZn 36pb3(36000)
 Mating pin Ø: 0.41 mm
 Mechanical life: min 500 cycles
 Rated current: 1 A
 Contact resistance: max 10 mΩ
 Dielectric strength: min 1000V_{RMS}



Ordering information


PEB - NNN X - A P 1030A

No. of Positions	Insulator Type code	Pin Plating code
	1 Single row	1 Tin150μ"
	2 Double row	2 Tin200μ"
	3 Triple row	3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

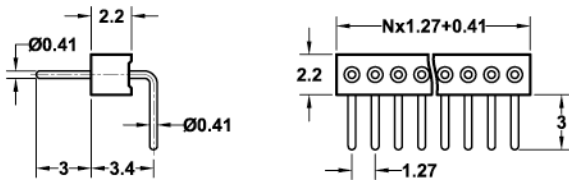


PEB-NNN1-AP1030A

Right angle pin connector: solder tail, single row
 Availability from: 2 to 50 contacts
 Standard number of contacts 25 and 50

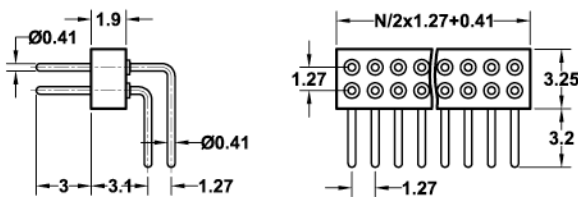


PEB-NNN2-AP1010A

Right angle pin connector: solder tail, double row
 Availability from: 4 to 100 contacts
 Standard number of contacts 50 and 100

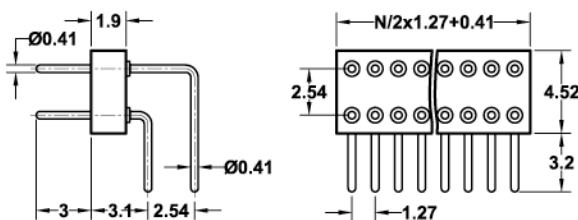

PEB-NNN2-BP1010A

Right angle pin connector: solder tail, double row with 2.54mm row to row distance
 Availability from: 4 to 100 contacts
 Standard number of contacts 100

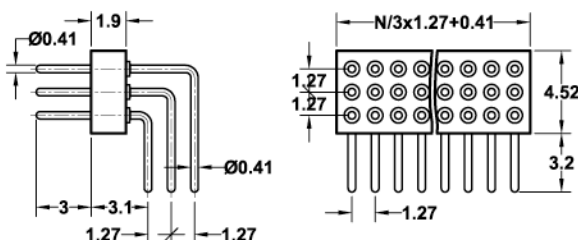

PEB-NNN3-AP1010A

Right angle pin connector: solder tail triple row
 Availability from: 6 to 150 contacts
 Standard number of contacts 150