

Pin connectors 2.00mm

Single row/double row


Solder tail

Series: PFA PFB

"Hard metric" PCB Pin connectors, Solder tail

Technical Specs:


Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass CuZn 36pb3(36000)
 Mating pin Ø: 0.47 mm
 Mechanical life: min 500 cycles
 Rated current: 3 A
 Contact resistance: max 10 mΩ
 Dielectric strength: min 1000V RMS

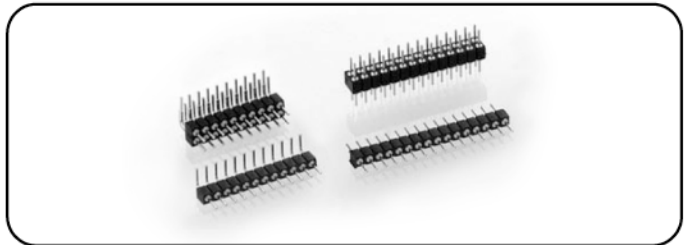

Ordering information


PFA - NNN X - A P 1000A

No. of Positions	Insulator Type code	Pin Plating code
	1 Single row	1 Tin150μ"
	2 Double row	2 Tin200μ"
		3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

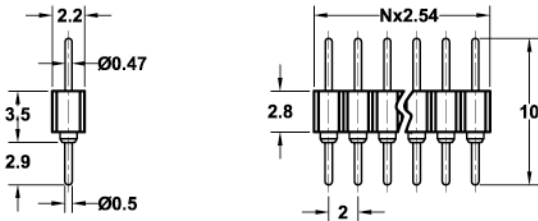


PFA-NNN1-AP1000A

Straight pin connector :solder tail, single row
 Availability from: 2 to 40 contacts
 Standard number of contacts 40

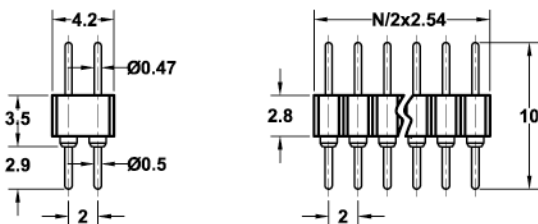


PFA-NNN2-AP1000A

Straight pin connector solder tail, double row
 Availability from: 4 to 80 contacts
 Standard number of contacts 40

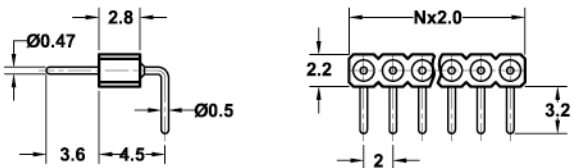

PFB-NNN1-AP1220A

Right angle pin connector solder tail, single row
 Availability from: 2 to 40 contacts
 Standard number of contacts 40

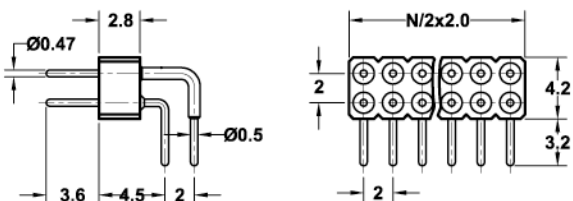

PFB-NNN2-AP1220A

Right angle pin connector solder tail, double row
 Availability from: 4 to 80 contacts
 Standard number of contacts 80