REV	MODIFICATION	DATE	DRAW

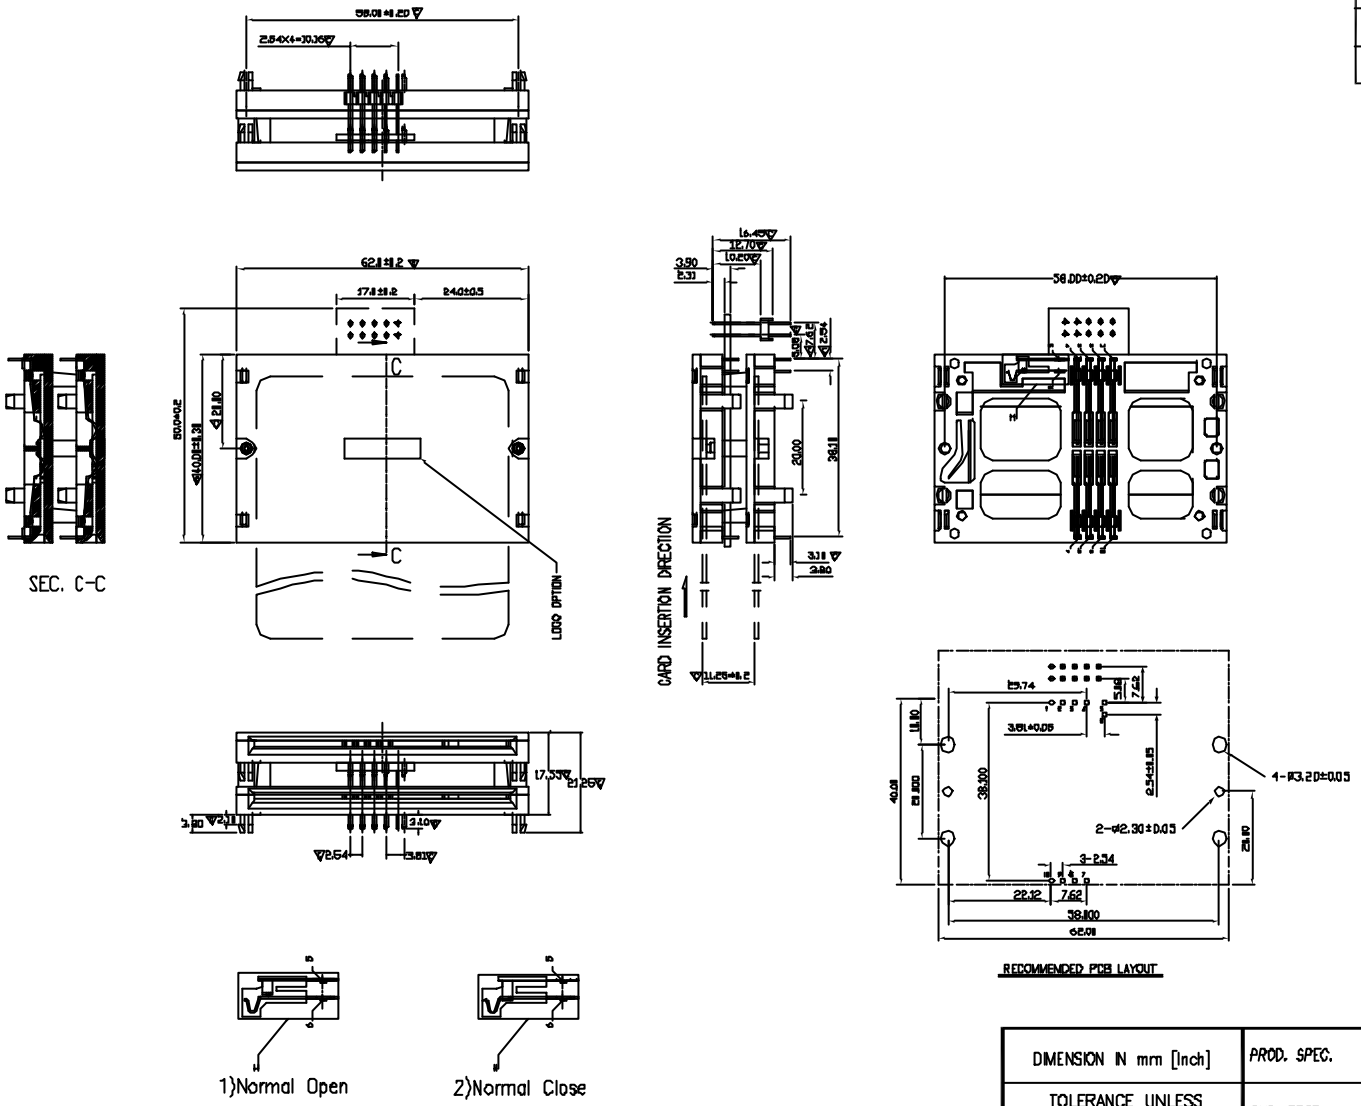

NOTE:

1.CARD INSERTION SPECIFICATION

A. CARD INSERTION DEPTH:35.3 MM.

B. CARD THICKNESS=0.7-0.8 MM.

2.READING CONTACT:

POSITION:ACCORDING TO

ISO 07816-2 C1-C8.

CONTACT FORCE:30-50 GRAM.

3.MATERIAL AND FINISH:

A. HOUSING: PBT UL 94-V0 COLOR: BLACK.

B. CONTACT:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.

C. SWITCH:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.

▽ CRITICAL DIMENAION

ORDER INFORMATION:

SMCRB-41810BLD X -G

Switch Contact Type:
1-Normal Open
2-Normal Close

DIMENSION IN mm [Inch]		PROD. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.
.X±0.30	X.°± 2°	APPROVE
.XX±0.20	.X°± 1°	CHECK
.XXX±0.10	.XX°±	DRAW

TITLE SMART CARD CONN. SPOON TYPE		CUSTOMER DRAWING
FILE NO.	DWG NO. SMCRB-41810BLOX-G	
SIZE A4	PROJ. / SCALE 1:1	SHEET 1 / 1 REV A

8F-01-R10